DIGITUS® DisplayPort Connection Cable, 3m

DB-340100-030-S

EAN 4016032292159



DisplayPort Connection Cable, Type DP M/M, 3.0m, w/interlock, UHD 4K, DP 1.2, bl

This high performance HD digital audio and video cable for example is used to connect a PC or notebook with DisplayPort interface to a monitor with DisplayPort interface.

Save and reliable connection based on the snap fastener at connector

- Supported Video format: 4K/2K@24Hz, 4K/2K@30Hz or 4K/2K@60Hz
- Supported Video Resolution: 4096 x 2160p; 1920 x 1080p
- Maximal bandwidth: 21,6 Gbps
- HBR-Version/transfer mode: HBR2 (5,40 Gbit/s per lane)
- HDCP-Version: HDCP 1.3

Attributes

- AWG: 28
- Color cable: black
- Connector 1: DP, plug
- Connector 2: DP, plug
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.2
- Ferrite filter: none
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Interlock: Snap fastener
- Length: 3 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

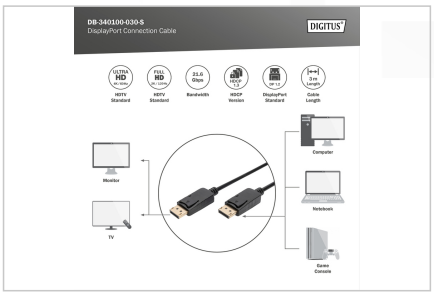
Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	11.00	54.00	34.00	30.00	55,080.00
Packaging Unit Inside	10	2.75	26.00	16.00	28.00	11,648.00
Packaging Unit Single	1	275.00	4.00	8.00	26.00	832.00
Net single without Packaging	0	245.00	3.00	6.00	20.00	360.00

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

More images:


DB-340100-030-S
DisplayPort Connection Cable
DIGITUS


DB-340100-030-S
DisplayPort Connection Cable
DIGITUS

