
DIGITUS® CAT 6A S/FTP Patch Cable, 15 m, PUR (TPU)

DK-1644-A-PUR-150

EAN 4016032434757

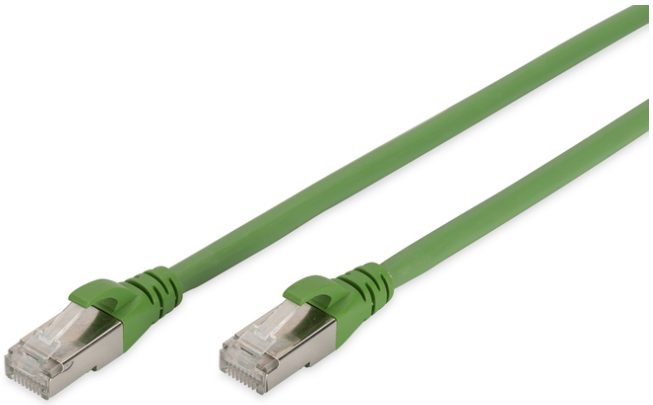

CAT 6A S-FTP patch cord, Cu, PUR AWG 26/7, 15.00 m, green, (similar to RAL 6018)

The Category 6A, S/FTP patch cables feature a PUR jacket that provides good resistance to oil, making them suitable for industrial use. Additional properties of the PUR jacket include UV resistance and self-extinguishing properties in the event of a fire. DIGITUS® Category 6A Class EA patch cables are manufactured and tested in accordance with the ISO/IEC 11801 and DIN EN 50173 CAT 6A standards. They ensure that the cable installation complies with the ISO & EN Channel specifications and deliver outstanding performance in DIGITUS® CAT 6A cabling. Performance has been tested up to 500 MHz, including performance characteristics such as near-end crosstalk (NEXT). They have been specifically designed to fully meet all requirements across various application areas. Each cable is equipped with an injection-molded kink-protection sleeve with strain relief. Additionally, the sleeve features a latch protection mechanism that prevents the cables from getting snagged and the latch from breaking off the connector.

Outstanding performance and connection quality for your network. Ideal for industrial applications.

- 2 RJ45 connectors (8P8C)
- Covers with kink protection, strain relief, and latch protection
- Length markings on the hoods
- Inner conductor: Copper (Cu)

Attributes

- Assortment: Twisted Pair Patch Cables
- Configuration: 1:1
- Packaging: DIGITUS Polybag
- Category: CAT 6A
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 15 m
- Color: green
- Jacket: PUR
- Slim Version: no
- Structure: 4 x 2 AWG 26/7, twisted pair
- Flat Version: no

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	25	13.20	46.00	33.00	28.00	42,504.00
Packaging Unit Inside	5	2.64	25.00	33.00	49.00	40,425.00
Packaging Unit Single	1	528.00	5.00	23.00	32.00	3,680.00
Net single without Packaging	0	0.47	1,500.00	1.17	1.27	2,228.85

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.