
DIGITUS® Fiber Optic simplex patch cable, Singlemode, LC/APC - LC/APC, 15 m

DK-2933-15-APC-SX

EAN 4016032496649

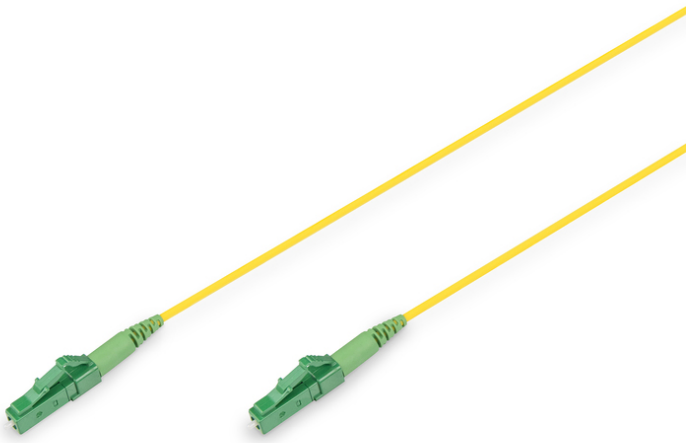

FO patch cord, SM, Simplex, LC/APC to LC/APC G657.A02, 15m

The single mode simplex fiber cable enables easier installation due to their bend insensitive characteristic. It is designed to transmit data with less attenuation when bent or twisted and as a result the cables are very efficient. Therefore, this makes the cable excellently suited for confined spaces. It is ideal for use in telecommunications, FTTx (FTTH, FTTB) applications and also gives more space for high-density cable installation requirements in enterprise networks, telecom rooms, server farms, horizontal and equipment distribution areas.

High-quality fibre simplex patch cables offer an excellent connectivity option for indoor and FTTx applications. The longetivity of cables is ensured by reliable connector performance.

- Fiber type : Singlemode 9/125
- Category : G657A2
- Cable length : 15 m
- Number of fibers: 1
- Cable structure : Simplex
- Connector 1 type : LC/APC
- Connector 2 type : LC/APC
- Maximum tractive force : 100 N
- Cable type : I-V(ZN) H
- Cable Ø : 2.0 mm
- Minimum Bend Radius : 7.5 mm
- Sheath color : Yellow
- Jacket material : LSZH
- Insertion loss 1310 nm : 0.3 dB
- Working temperature : -20 - 70 °C
- Storage temperature : -20 - 85 °C

Attributes

- Application: indoor
- Boot: single-color
- Cable diameter: 2 mm
- Cable jacket: LSOH
- Color cable: yellow
- Connector 1: LC (APC)
- Connector 2: LC (APC)
- Fiber class: OS2
- Fiber diameter: 9/125µ
- Mode: Singlemode
- Number of connectors side 1: 1
- Number of connectors side 2: 1
- Number of fibers: 1
- Polishing: APC
- Length: 15 m

Package contents

- 1 x Fiber Optic simplex patch cable, Singlemode, LC/APC - LC/APC, 15 m

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.00	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

More images:

