DIGITUS® Line-interactive UPS, 2000 VA/1200 W

DN-170076

EAN 4016032441380



Line-Interactive UPS, 2000VA/1200W 12V/9Ah x2 battery,4x CEE 7/7,USB,RS232,RJ45,LCD

The DIGITUS® Line-Interactive UPS systems provide uninterruptible power supply in a compact size and with excellent microprocessor control, which guarantees high reliability. Protect your office or business equipment against data loss and damage caused by faults in the power grid or power failures. The UPS devices are easy to use and offer maximum performance and security. Features such as overload, discharge and overcharge protection, a cold start function and energy-saving properties as well as an acoustic alarm system are just some of the advantages of the DIGITUS® Line-Interactive UPS systems.

Provides reliable protection against data loss and voltage damage in the office and home office

- Excellent microprocessor control guarantees high reliability in the event of a power failure
- Automatic restart while the voltage is being restored
- Cold start function
- Connection: 4x sockets with earthing contact, 2x RJ45, 1x RS232, 1x USB 2.0 type B
- Input voltage: 230 VAC
- Voltage range: 162-290 VAC
- Frequency range: 50-60 Hz (auto sensing)
- Output voltage: 230 VAC ± 10%
- AC regulation (battery mode): 10%
- Capacity: 2000 VA/1200 W
- Frequency range (battery mode): 50 Hz ± 1%
- Typical transfer time: 2-6 ms
- Waveform (battery mode): Simulated sine wave
- Battery: 12V/9Ah x2
- Typical charging time: 6-8 hours to restore 90% of capacity
- Alarm sounds: battery mode (sounds every 10 seconds), low battery status (sounds every second), overload (sounds every 0.5 seconds), error (sounds continuously)
- Humidity: 0-95% RH @ 0 °C up to +40 °C (non-condensing)
- Noise level: under 40 dB
- With overload, discharge and overcharge protection
- Buck/boost converter to stabilize the voltage
- LCD display
- Dimensions (H x W x D): 198 x 158 x 380 mm
- Weight: 10.5 kg

Attributes

- Installation: Desktop
- Plug: CEE7/7
- Power: 1500VA – 3000VA
- Technology: Line-interactive

Package contents


- UPS
- QIG
- USB cable
- RS232 cable
- Mains cable (input)

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	11.50	45.20	22.20	29.50	29,601.50
Packaging Unit Inside	1	11.50	44.20	21.20	28.00	26,237.10
Packaging Unit Single	1	11.50	44.20	21.20	28.00	26,237.10
Net single without Packaging	0	10.50	38.00	15.80	19.80	11,887.90

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.


More images:

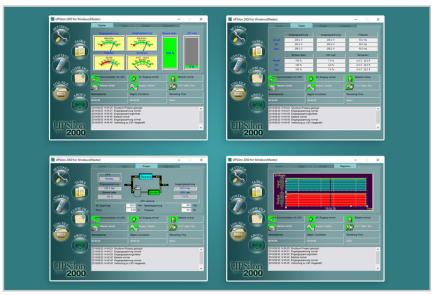






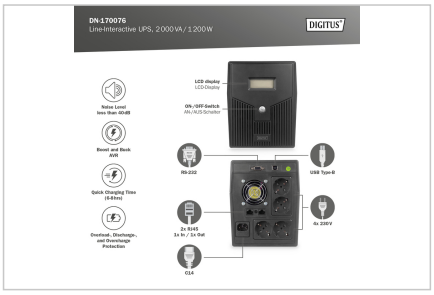


DN-170076
Line-Interactive UPS, 2000 VA / 1200 W
DIGITUS

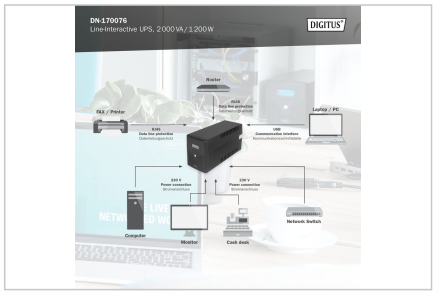
DN-170076
Line-Interactive UPS, 2000 VA / 1200 W
DIGITUS


DIGITUS
Line-Interactive UPS,
2.000 VA / 1.200 W


DIGITUS
LINE-INTERACTIVE
UPS, 2000 VA/1200 W

