DIGITUS® KVM Switch, 4x1 DP, DP Out,USB

DS-12891

EAN 4016032487876



KVM Switch, 4x1 DP, DP Out,USB 4 x DP + 4x USB +4 Speaker + 4 Micro

The DS-12891 is a desktop KVM switch that offers seamless switching between devices from DP+ Audio + MIC + USB devices. It is equipped with local control interfaces that allow you to easily manage and control all connected devices. The front USB interface provides easy access to connect USB peripherals such as keyboard, mouse, USB flash drive, printer and more. With support for hotkey switching and keypad switching, the DS-12891 is easy to use and allows you to switch between devices without interrupting your workflow. Whether you're a professional user working on multiple projects or a gamer who needs seamless control over your gaming setup, the DS-12891 is the perfect solution. Thanks to its sleek and compact design, the DS-12891 is ideal for a variety of settings, including home offices, gaming rooms and professional workspaces. If you're looking for a reliable and easy-to-use interface controller that meets your demanding requirements, the DS-12891 is the right choice.

With 4K @ 60HZ resolution and dual Displayport inputs, this KVM switch offers impressive picture quality and flexibility when connecting to multiple devices. The additional ports on the front and support for Dolby True HD and DTS HD Master Audio make it a versatile choice for all types of applications.

- Resolution: 4K @ 60HZ(3840 x 2160 @6 0HZ)
- Inputs: 4 x Displayport inputs (4x1), 4 x USB B, 4x audio combo socket 3.5 mm jack (microphone, loudspeaker)
- Outputs (console): 1 x Displayport, 2 x USB A (mouse, keyboard), 2 x stereo audio 3.5m jack (microphone, speakers)
- Additional connection on the front: 1 x USB A for additional peripheral devices such as printers or USB sticks
- USB specification: USB 2.0 compliant (FullSpeed)
- Supported audio formats: Dolby True HD, DTS HD Master Audio
- Switching between the PCs: Switch on the front panel or hot keys
- Status LED on front panel shows current configuration
- The device is platform-independent and suitable for all operating systems
- Operating temperature: 0°C ~ 50°C
- Storage temperature: -20°C ~ 60°C
- Operating humidity: 0 - 80% RH (non-condensing)
- Housing material: metal
- Power supply: via USB or optional 5 V DC power supply unit
- Dimensions: 20.2 x 11.0 x 4.4 cm (W x D x H)
- Weight: 760 g
- Power consumption specification: Input: AC 100 - 240V,⊠Output: DC 5V / 2000mA
- Device power consumption (max.): 2.7W
- DC plug size: 5.5 x 2.1 mm
- DC plug electrode: Inside (+) , Outside (-)

Attributes

- Number of ports: 4

Package contents

- 1 desktop KVM switch
- 4 sets of KVM connection cables 1.8m
- 1 User manual

Logistics

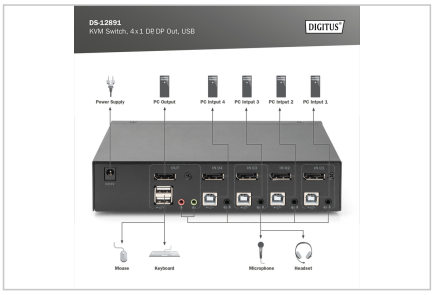
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	8	1.16	44.00	29.00	40.00	51,040.00
Packaging Unit Inside	1	145.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	145.00	9.30	21.00	28.00	5,468.40
Net single without Packaging	0	0.74	4.40	11.00	20.20	977.68

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

More images:




DS-12891
KVM Switch, 4 x 1 DP DP Out, USB
DIGITUS

DS-12891
KVM Switch, 4 x 1 DP DP Out, USB
DIGITUS

DS-12891
KVM Switch, 4 x 1 DP DP Out, USB
DIGITUS

DS-12891
KVM Switch, 4 x 1 DP DP Out, USB
DIGITUS
