DIGITUS® USB 2.0 serial adapter

DA-70156

EAN 4016032271611



USB 2.0 to serial Converter, DSUB 9M incl. USB A Cable 80cm, FTDI chipset

The DIGITUS® USB2.0 serial adapter offers a practical solution for providing serial connectivity. A serial RS232 interface is no longer available on newer hardware. The DIGITUS® USB2.0 serial adapter enables data exchange between a USB2.0 port on the computer and peripheral devices with a serial interface (COM port, RS232), such as weather stations, sensors, machine controls, set-top boxes, games consoles, PDAs, scanners, modems, ISDN adapters and many other peripheral devices. The USB2.0 serial adapter is downwards compatible with USB1.1 and enables customizable baud rates between 75 bits and 128,000 bits per second. The individually configurable FTDI chipset ensures compatibility with all common operating systems and also supports power management and remote wake-up. Power is supplied via the USB port; a separate power supply unit is not required.

Provides a serial RS232 interface via USB2.0

- Provides a serial RS232 interface via USB 2.0
- Complies with the USB 2.0 standard
- Backwards compatibility with USB 1.1
- Customizable data transfer rates between 75 bits and 128,000 bits per second
- Supports remote wake-up and power management
- Chipset: FTDI / FT232RNL
- Individual configuration via the FTDI chipset
- 1× RS232 plug (Sub D 9-pin) / 1× USB A plug
- Interface: Full Duplex
- Gold-plated contacts
- Incl. USB extension cable, approx. 80 cm
- Supports Windows 11, 10, 8.1, 8, 7, Vista, XP, Mac OS X and Linux
- True 5V / 3.3V / 2.8V / 1.8V CMOS output and TTL input

Package contents

- USB - Serial Adapter
- USB extension cable
- Driver CD

Logistics

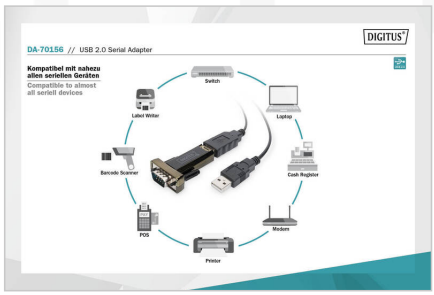
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	150	13.00	50.40	21.30	47.00	50,455.40
Packaging Unit Inside	1	0.09	18.50	8.50	2.30	361,675.00
Packaging Unit Single	1	0.09	9.00	9.00	3.00	243.00
Net single without Packaging	0	22.00	7.40	1.80	1.50	19.98

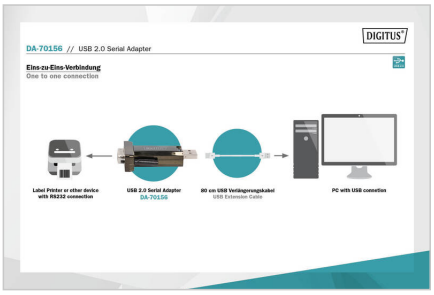
Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

More images:


DIGITUS
USB TO SERIAL CONVERTER


DIGITUS
USB TO SERIAL CONVERTER


DIGITUS
DA-70156 // USB 2.0 Serial Adapter
Kompatibel mit nahezu alles seriellen Geräten
Compatible to almost all serieli devices
Switch
Laptop
Label Writer
Barcode Scanner
Cash Register
POS
Modem
Printer


DIGITUS
DA-70156 // USB 2.0 Serial Adapter
Eins-zu-Eins-Verbindung
One to one connection
Label Printer or other device with RS232 connection
USB 2.0 Serial Adaptor
DA-70156
80 cm USB Verlängerungskabel
USB Extension Cable
PC with USB connetion

